

## Multimode Optical Coupler




### Features

- Low excess loss
- Uniform Power Splitting
- Rugged Package
- Excellent Environmental & Mechanical Stability
- NX4(n=1,2,4) NX8(n=1,2,8) port ratios are available.

### Applications

- Long-haul Telecommunications
- Digital, Hybrid and AM-Video Systems
- High Speed Local Area Networks
- CATV System

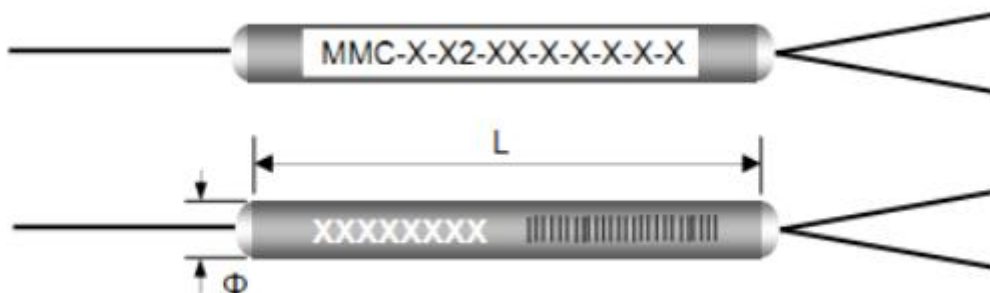

### Package Dimensions & Pigtail Style

Package Dimensions	
Package A	3.0mm x 48mm stainless steel tube
Package A	3.0mm x 55mm stainless steel tube
Package A	90mm x16mm x 9mm case
Pigtail Style	
Package A	250μM bare fiber
Package A	900μM loose tube
Package A	900μM loose tube or 2mm/3mm cable

\*Other package dimensions can be made on customer request.

### Ordering information

MMC-	x-	X2-	35-	XX-	X-	XX-	xx-	x
	P:Premium A:Grade A X: On request	12:1X2 22:2X2	85:850nm 31:1310NM	01: 01:99 02: 02:98 ..... 50: 50:50	1: 1 meter x: on request	25:250μ M Fiber 09:900μ M loose Fiber	SC:SC/UPC SA:SC/APC ..... 00:no connect	A: A B: B C:C
	Grade	Port Number	Operation Wavelength	Coupling Ratio	Fiber Length	Fiber Type	Connect Type	Dimension

EX: MMC-P-12-31-50-1-25-00-A

